




DRY APPLICATION FOR SMALL GRAPHICS

What you need :


- A plastic squeegee
- Adhesive tape

Texts and logos cut by a plotter or by standard cutting should always be installed using application film. This application film is laminated on the graphic, and prevent any distortion of its shape during the application process.


1 Set the graphic in the right position with adhesive tape, including the protective sheet and the application film. Also prepare a horizontal or vertical hinge.

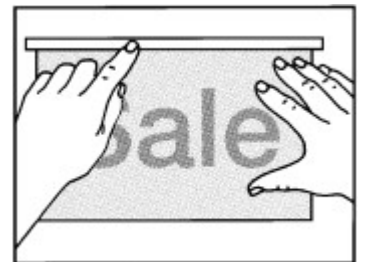


2 Wrap the graphics to the rear of the hinge and remove part of the protective sheet. Remove it completely if the size of the graphic is small enough. Do not allow the sticky part of the graphic to touch the vehicle.

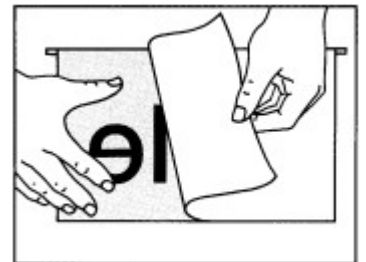

3 Without touching the adhesive part of the graphic, use the plastic squeegee to press the graphic in to place, using even strokes. Continue application from the edge of the hinge to the end of the graphic.

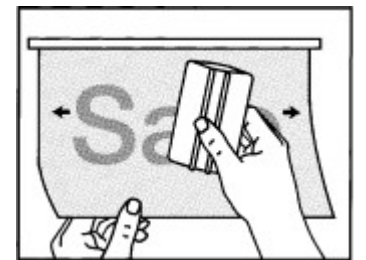

4 Wait a few minutes before removing the application film. This will prevent air bubbles to appear. Then peel the application film, keeping an 180° angle. One finished, check the edges of the graphic, smoothing them out with the squeegee if required.

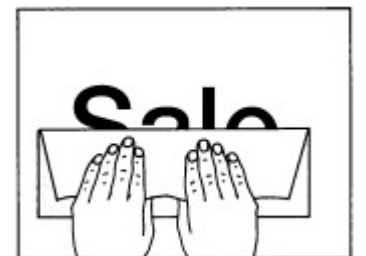

5 Enjoy your work !